


Cable release system

The following points must be observed:


- The release tappet must not be cylindrical (a mushroom shape is the most suitable)
- The gas spring should have a release travel of 3.5 mm (normal release)

Upon request, we also deliver the complete release system fully assembled and with the release button already adjusted. Then the only thing you have to do is attach the Bowden wire and clip the plastic sleeve into the receiving fork - and the SUSPA spring is fully integrated.

Mounting on VARILOCK-type gas springs

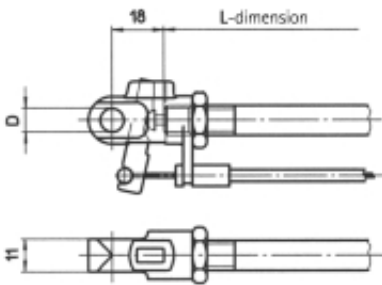

Mounting on VOB-type gas springs

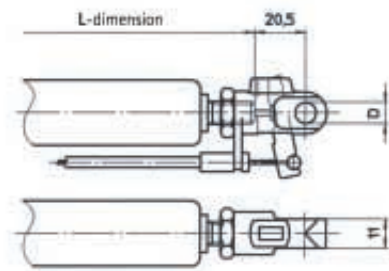


Bowden wires with integrated release lever


D = Ø 8 mm 021 50106

D = Ø 10 mm 021 50107

Bowden wires with integrated release lever

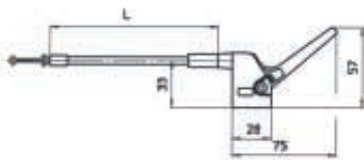

Bowden wires with adjusting screw

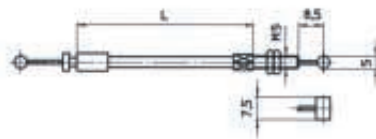

The length "L" is selectable between 200mm and 1500mm in increments of 100mm

Order example: Bowden wire with lever L=600mm

Order example: Bowden wire L=600mm